

Date:

May 31, 2023

Applicant: ZHAO QING BO HAN SPORTS COMPANY LTD

1ST OF NO 2 KANGTAI STREET, GAOXIN DISTRICT ZHAOQING, GUANGDONG, CN

Attn: ZHANGMING

Sample Description:

Eight (8) pieces of submitted sample said to be:

Item Name : Bicycle Helmets

Item/Model No. : **KS60**Helmet Size : L(58-61cm)

Age Grading for Testing : 5+
Material for Helmet : She

Shell -PC Liner -EPS

Date Sample Received : May 15, 2023

Testing Period : May 15, 2023 ~ May 31, 2023



Tests conducted:

As requested by the applicant, refer to attached page(s) for details.

Conclusion:

Tested samplesStandardResultSubmitted helmets16 CFR part 1203: safety standard for bicycle helmetsPass

Authorized by:

For Intertek Testing Services

Shenzhen Ltd.











Tests Conducted

1 Safety Standard for Bicycle Helmets

As per 16 CFR part 1203: safety standard for bicycle helmets.

Helmet Positioning Index (HPI) (From reference plane): 18 mm for ISO M Headform.

Clause	Test Items	Result
1203.5	Construction requirements—projections Any unfaired projection extending more than 7 mm (0.28 in.) from the helmet's outer surface shall break away or collapse when impacted with forces equivalent to those produced by the applicable impact-attenuation tests in § 1203.17 of this standard. There shall be no fixture on the helmet's inner surface projecting more than 2 mm into the helmet interior.	Р
1203.6	Labeling and instructions	
1203.6 a)	 Labeling Each helmet shall be marked with durable labeling so that the following information is legible and easily visible to the user: Model designation. A warning to the user that no helmet can protect against all possible impacts and that serious injury or death could occur. A warning on both the helmet and the packaging that for maximum protection the helmet must be fitted and attached properly to the wearer's head in accordance with the manufacturer's fitting instructions. A warning to the user that the helmet may, after receiving an impact, be damaged to the point that it is no longer adequate to protect the head against further impacts, and that this damage may not be visible to the user. This label shall also state that a helmet that has sustained an impact should be returned to the manufacturer for inspection, or be destroyed and replaced. A warning to the user that the helmet can be damaged by contact with common substances (for example, certain solvents [ammonia], cleaners [bleach], etc.), and that this damage may not be visible to the user. This label shall state in generic terms some recommended cleaning agents and procedures (for example, wipe with mild soap and water), list the most common substances that damage the helmet, warn against contacting the helmet with these substances, and refer users to the instruction manual for more specific care and cleaning information. Signal word. The labels required by paragraphs (a) (2) through (5) of this section shall include the signal word "WARNING" at the beginning of each statement, unless two or more of the statements appear together on the same label. In that case, the signal word need only appear once, at the beginning of the warnings. The signal word "WARNING" shall be in all capital letters, bold print, and a type size equal to or greater than the other text on the label. 	P
1203.6 b)	Instructions Each helmet shall have fitting and positioning instructions, including a graphic representation of proper positioning.	۲





1号楼3、4、5层及1楼西侧半层和3号楼整栋1-5层



Tests Conducted

Intertek Testing Services Shenzhen Ltd.

深圳天祥质量技术服务有限公司

Clause	Test Items	Result
1203.12	Test requirements.	Loouit
	(a) Peripheral vision	Р
	All bicycle helmets shall allow unobstructed vision through a minimum	•
	of 105° to the left and right sides of the midsagittal plane when	
	measured in accordance with § 1203.14 of this standard.	
	(b) Positional stability	Р
	No bicycle helmet shall come off of the test headform when tested in	•
	accordance with § 1203.15 of this standard.	
	(c) Dynamic strength of retention system	Р
	All bicycle helmets shall have a retention system that will remain intact	(See appendix)
	without elongating more than 30 mm (1.2 in.) when tested in	(000 0/// 000000)
	accordance with § 1203.16 of this standard.	
	(d) Impact attenuation criteria	Р
	(1) General. A helmet fails the impact attenuation performance test of	(See appendix)
	this standard if a failure under paragraph (d)(2) of this section can be	(Goo appoints)
	induced under any combination of impact site, anvil type, anvil impact	
	order, or conditioning environment permissible under the standard,	
	either with or without any attachments, or combinations of	
	attachments, that are provided with the helmet. Thus, the Commission	
	will test for a "worst case" combination of test parameters. What	
	constitutes a worst case may vary, depending on the particular helmet	
	involved.	
	(2) Peak acceleration. The peak acceleration of any impact shall not	
	exceed 300 g when the helmet is tested in accordance with § 1203.17	
	of this standard.	
1203.34	Product certification and labeling by manufacturers (including	Р
	importers)	
	Contents of certification label.	
	The certification labels required by this section shall contain the following:	
	(1) The statement "Complies with U.S. CPSC Safety Standard for	
	Bicycle Helmets for Persons Age 5 and Older" or "Complies with U.S.	
	CPSC Safety Standard for Bicycle Helmets for Persons Age 1 and	
	Older (Extended Head Coverage)", as appropriate; this label may	
	spell out "U.S. Consumer Product Safety Commission" instead of	
	"U.S. CPSC";	
	(2) The name of the U.S. manufacturer or importer responsible for	
	issuing the certificate or the name of a private labeler; (3) The address of the U.S. manufacturer or importer responsible for	
	(3) The address of the U.S. manufacturer or importer responsible for issuing the certificate or, if the name of a private labeler is on the	
	issuing the certificate or, if the name of a private labeler is on the label, the address of the private labeler;	
	(4) The name and address of the foreign manufacturer, if the helmet was	
	manufactured outside the United States;	
	(5) The telephone number of the U.S. manufacturer or importer	
	responsible for issuing the certificate or, if the name of a private	
	labeler is on the label, the telephone number of the private labeler;	
	(6) An identification of the production lot;	
	(7) The uncoded month and year the product was manufactured.	
	(c) Coding	
	(1) The information required by paragraphs (b)(4) and (b)(6) of this	
	section, and the information referred to in paragraph (c)(2) of this	
	section, may be in code, provided:	
	(i) The person or firm issuing the certificate maintains a written record of	
	the meaning of each symbol used in the code, and	
	(ii) The record shall be made available to the distributor, retailer,	
<u>[</u>		



Tel:+86755 26020111

www.intertek.com www.intertek.com.cn





Tests Conducted

Clause T	Test Items	Result
(consumer, and Commission upon request. (2) A serial number may be used in place of a production lot identification on the helmet if it can serve as a code to identify the production lot. If a bicycle helmet is manufactured for sale by a private labeler, and if the name of the private labeler is on the certification label, the name of the manufacturer or importer issuing the certificate, and the name and address of any foreign manufacturer, may also be in code. (d) Placement of the label(s) The information required by paragraphs (b)(2), (b)(3), and (b)(5) of this section must be on one label. The other required information may be on separate labels. The label(s) required by this section must be affixed to the bicycle helmet. If the label(s) are not immediately visible to the ultimate purchaser of the bicycle helmet prior to purchase because of packaging or other marketing practices, a second label is required. That label shall state, as appropriate, "Complies with U.S. CPSC Safety Standard for Bicycle Helmets for Persons Age 5 and Older", or "Complies with U.S. CPSC Safety Standard for Bicycle Helmets for Persons Age 1 and Older (Extended Head Coverage)". The label shall be legible, readily visible, and placed on the main display panel of the packaging or, if the packaging is not visible before purchase (e.g., catalog sales), on the promotional material	Result
(used with the sale of the bicycle helmet. This label may spell out "U.S. Consumer Product Safety Commission" instead of "U.S. CPSC." (e) Additional provisions for importers (f) General. The importer of any bicycle helmet subject to the standard in subpart A of this part 1203 must issue the certificate of compliance required by section 14(a) of the CPSA and this section. If a reasonable testing program meeting the requirements of this subpart has been performed by or for the foreign manufacturer of the product, the importer may rely in good faith on such tests to support the certificate of compliance, provided: (i) The importer is a resident of the United States or has a resident agent in the United States, Required by § 1203.41 of subpart C of this part, and (ii) Such records are available to the Commission within 48 hours of a request to the importer. (2) Responsibility of importers. Importers that rely on tests by the foreign manufacturer to support the certificate of compliance shall—in addition to complying with paragraph (e)(1) of this section—examine the records supplied by the manufacturer to determine that they comply with § 1203.41 of subpart C of this part.	

Abbreviation: P = Pass







Tests Conducted

Appendix:

Intertek Testing Services Shenzhen Ltd.

深圳天祥质量技术服务有限公司

Sample	#1	#2	#3	#4	#5	#6	#7	#8
Weight	264.1 g	268.6 g	271.8 g	274.9 g	269.7 g	263.8 g	266.9 g	263.6 g

Laboratory Conditioning Environment

Barometric Pressure:	101 kPa	Cold:	-15.0 °C
Laboratory Humidity:	61 %	Hot:	50.0 °C
Ambient:	22.3 °C	Wet:	21.2 °C

Instrumentation Check

PRE TEST		
Impact #	V (m/s)	Peak g's
·	5.33 - 5.55	380 - 425
1	5.41	402.5
2	5.40	401.8
3	5.43	404.0
	Difference in g's	2.2

POST TEST		
Impact #	V (m/s)	Peak g's
·	5.33 - 5.55	380 - 425
1	5.40	400.4
2	5.41	401.9
3	5.40	400.0
	Difference in g's	1.9

Section 1203.12 - Dynamic strength of the retention system

Sample No.	Environment Impact	Dynamic displacement (mm)	Compliant
1	Ambient	17.6	Pass
2	High	20.8	Pass
3	Low	17.6	Pass
4	Water	16.6	Pass



Tel:+86755 26020111

www.intertek.com www.intertek.com.cn





Tests Conducted

Section 1203.12 - Impact Attenuation Test

	2 – impact Attenua		1		I
Sample No.	Anvil	Location Impact	Velocity (m/s)	Peak (Gn)	Compliant
	Flat	Front	6.16	189.1	Pass
1 Ambient		Right	6.13	201.8	Pass
1 Allibielii	Hemispherical	Rear	4.83	110.0	Pass
	Пеннорненса	Left	4.73	118.0	Pass
	Flat	Crown	6.16	203.2	Pass
2 High	I lat	Front	6.12	184.9	Pass
Z Fligh	Hemispherical	Right	4.68	116.1	Pass
		Rear	4.84	109.1	Pass
	Flat	Crown	6.17	217.7	Pass
3 Low		Rear	6.18	200.4	Pass
3 LOW	Hemispherical	Left	4.81	119.4	Pass
		Front	4.72	102.5	Pass
	Flat	Rear	6.16	197.6	Pass
4 Water		Left	6.13	208.8	Pass
4 Water	Hemispherical	Front	4.69	97.4	Pass
		Crown	4.88	103.9	Pass
5 Ambient		Front	4.86	110.0	Pass
6 High	Curbstone	Crown	4.74	105.8	Pass
7 Low	Curpsione	Rear	4.93	122.7	Pass
8 Water		Right	4.75	133.9	Pass

Photos for reference









Tests Conducted









Tests Conducted








1号楼3、4、5层及1楼西侧半层和3号楼整栋1-5层



Tests Conducted

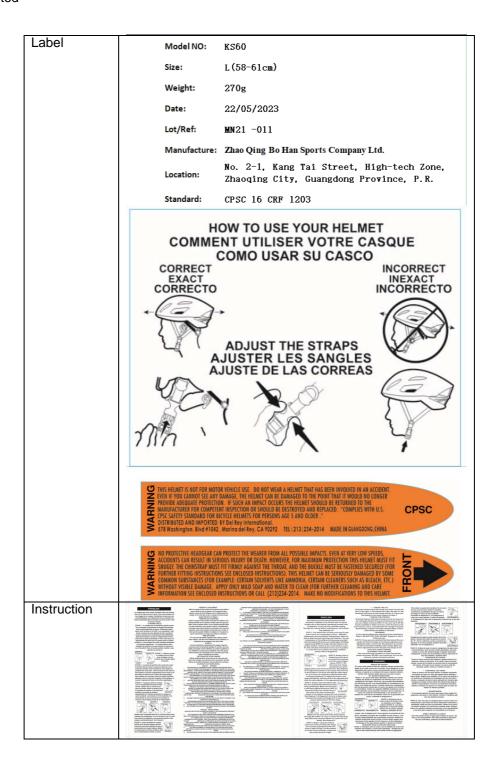





1 号楼 $3 \cdot 4 \cdot 5$ 层及 1 楼西侧半层和 3 号楼整栋 1-5 层



Tests Conducted










Test Report SZHH01804811 Number:

Tests Conducted

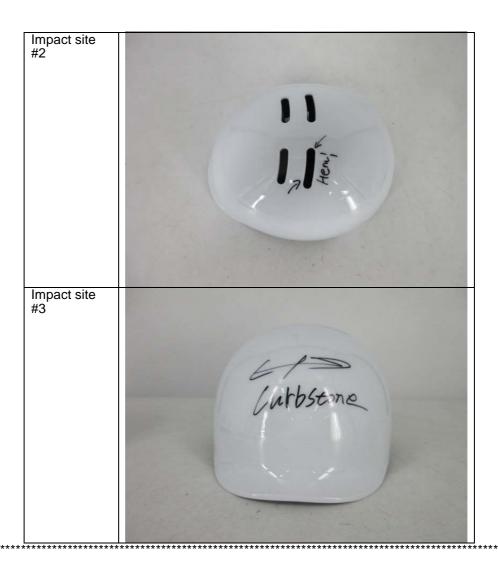

End of report

The statements of conformity reported have considered the decision rule agreed, namely that Intertek have taken account of measurement uncertainty as calculated by Intertek, and applied according to ILAC-G8/09:2019 (Non-binary acceptance based on guard band $\mathbf{w} = \mathbf{U}$) except designation from the customer, regulation or test specification. This decision rule only applies to the numeric test results.

The sample(s) and sample information hereto are provided by the client who shall be solely responsible for the authenticity and integrity thereof. The results shown in this report relate only to the sample(s) received and tested. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Client in respect of this report and only accepts liability to the Client insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or wilful misconduct. This report shall not be reproduced unless with prior written approval from Intertek.



